


		6	7
REV	DATE	MODIFICATION	DRAWN

A
B
C
D

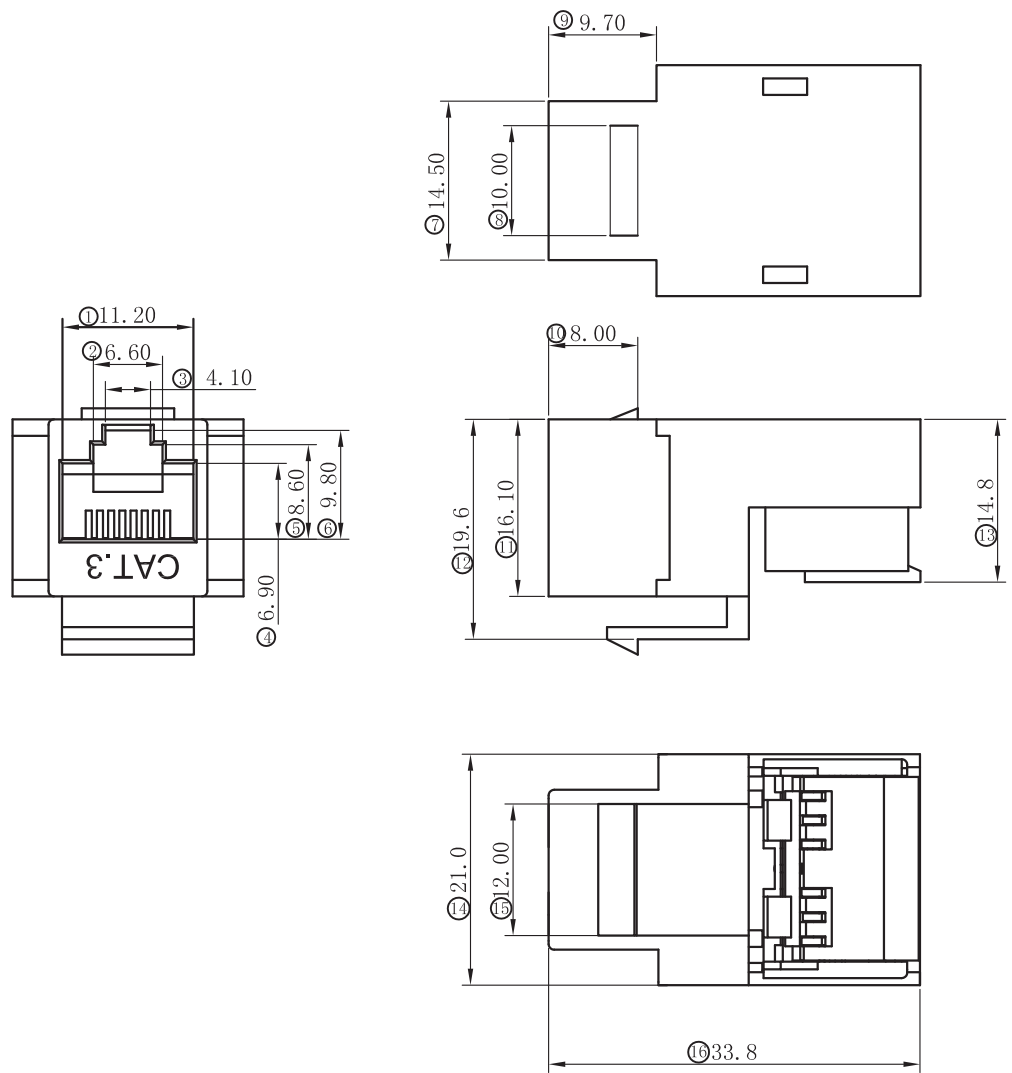

Main physical data sheet:

Color: WHITE

Pin:30-50"U"nickel plating inner side,surface golden plating

Moisture: more than 750 times mating cycles

MAIN Electric Parameter:

INSULATION RESISTANCE : >500M ohms

CONTACT RESISTANCE: <20m ohms

DIELECTRIC STRENGTH : DC1000V(AC700V)No punctured and overflash phenomenon within one minute

Return loss : 16 MHz , > 15 dB

Insertion loss : 16 MHz , <14.4 dB

Next loss : 16 MHz , > 19.4 dB

Attenuation: 100MHz , < 555ns

TIA/EIA : CAT 3

NINGBO BETTERBELL TELECOMMUNICATION EQUIPMENT				
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.	
.X±0.20	.X°±5°	TITLE SM-2057H4C3		
.XX±0.10	.XX°±2°			
APPROVAL	CHECKED	DRAWN	SCALE 1/1	SHEET 1/1
		cen	PROJ.	REV 1